

# SLA5800 Series

Elastomer Sealed, Digital,  
General Purpose Gas Mass Flow  
Controllers & Meters

The SLA5800 Series thermal mass flow controllers and meters have gained broad acceptance as the standard for accuracy, stability and reliability. These products have a wide flow measurement range and are suitable for a broad range of temperature and pressure conditions making them well suited for chemical and petrochemical research, laboratory, analytical, fuel cell and life science applications, among others.



## Features

Industry-Leading Long-Term Sensor Stability

User Accessible Service Port

Alarms and Diagnostics

Superior Valve Technology

High Accuracy Traceable to International Standards

Simple Modular Architecture

Adaptable Wide Range of Configurations

## Benefits

Increased system uptime and reduced cost of ownership by reducing maintenance and eliminating periodic recipe adjustments and/or recalibrations

Simplified installation, start-up, troubleshooting and access to diagnostics provide maximum uptime

Ensures device is operating within user specified limits for high process yield and uptime

Minimum leak-by, wide turndown, fast response and superior corrosion resistant materials reduces overall gas panel cost and increases throughput

Primary calibration backed by 17025 metrology systems ensures precise process gas flow control

Easy-to-service elastomer sealed design provides for factory or field service maximizing uptime and reducing total cost of ownership

Easily retrofit to existing systems

## SLA5800 Series Standard

Mass Flow Controller Model	Mass Flow Meter Model	Flow Ranges N <sub>2</sub> Eq. Ratings		Maximum Operating Pressure psi / bar		PED Module H Category
		Min. F.S.	Max. F.S.	Standard <sup>1</sup>	Optional <sup>1</sup>	
SLA5850	SLA5860	0.003 slpm	50 slpm	1500 psi / 103 bar	4500 psi / 310 bar @ Maximum Flow of 10 lpm	SEP
SLA5851	SLA5861	15 slpm	150 slpm <sup>2</sup>	1500 psi / 103 bar	N/A <sup>3</sup>	SEP
SLA5853	SLA5863	100 slpm	2500 slpm	1000 psi / 70 bar	N/A	Category 1 for all 150 lb flanges Category 2 for all other connections

<sup>1</sup> Sanitary fittings - Model code 5A, 5B, 5C, 5D & 5E rated to 500 psi Maximum Pressure.

<sup>2</sup> 600 lpm of H<sub>2</sub> possible with decreased accuracy; >40 psig inlet required for flows greater than 100 lpm N<sub>2</sub> equivalent.

<sup>3</sup> 4500 psi / 310 bar available as a special on SLA5861 only. Increased footprint, consult Applications Engineering for details.

	SLA5850/60	SLA5851/61	SLA5853/63
<b>Performance</b>			
<b>Full Scale Flow Range</b> (N <sub>2</sub> , Eq. 0°C Ref)	0.003 - 50 slpm	15 - 150 slpm	100 - 1100 slpm
<b>Flow Accuracy—17025 Certified Devices</b> (Includes linearity, excludes calibration system measurement uncertainty per SEMI E69) <sup>4</sup>	±0.6% of S.P. (20 - 100% F.S.), ±0.12% F.S. (<20% F.S.)		±0.6% of F.S.
<b>Flow Accuracy</b> (Includes linearity and calibration system measurement uncertainty per SEMI E69) <sup>4</sup>	±0.9% of S.P. (20 - 100% F.S.), ±0.18% of F.S. (<20% F.S.)		±1.0% of F.S.
<b>Control Range N<sub>2</sub>, eq.</b>	100:1 for F.S. from 1 - 50 slpm (50:1 for all other F.S. flows)		
<b>Repeatability &amp; Reproducibility</b>	0.20% S.P		
<b>Linearity</b>	Included in accuracy		
<b>Response Time</b> (Settling Time within ±2% F.S. for 0 - 100% command step)	<1 second		<3 second
<b>Zero Stability</b>	<+0.2% F.S. per year		
<b>Temperature Coefficient</b>	Zero: <0.05% of F.S. per °C Span: <0.1% of S.P. per °C		
<b>Pressure Coefficient</b>	±0.03% per psi (0 - 200 psi N <sub>2</sub> )		
<b>Attitude Sensitivity</b>	<0.2% F.S. maximum deviation from specified accuracy after re-zeroing		

<b>Ratings</b>	
<b>Operating Temperature Range</b>	(-14) - 65°C (7 - 149°F) <sup>5</sup>
<b>Minimum Pressure Differential</b> (Controllers)	5 psi / 0.35 bar
<b>Maximum Pressure Differential</b> (Controllers)	Application specific up to 4500 psi / 300 bar (limits conditions) <sup>6</sup>
<b>Leak Integrity</b> (External)	1x10 <sup>-9</sup> atm. cc/sec He
<b>Valve Shut Down</b> (Leak-by) <sup>7</sup>	<1% of F.S. standard; improved shutoff available with Biotech package

<b>Mechanical</b>	
<b>Valve Type</b>	Normally Closed, Normally Open, Meter
<b>Primary Wetted Materials</b>	316, 316/316L Stainless Steel, High Alloy, Stainless Steel, Viton® fluoroelastomers, Buna-N, Kalrez®, Teflon®/ Kalrez®, and EPDM

<b>Diagnostics</b>	
<b>Status Lights</b>	Normally Closed, Normally Open, Meter
<b>Alarms</b>	Communications protocol dependent. Full set available on EtherNet/IP and PROFINET. See communications manuals for list.
<b>Diagnostic / Service Port</b>	RS485 via 2.5mm jack

<sup>4</sup> Accuracy at calibration conditions; accuracy spec valid across the full control range.

<sup>5</sup> Hazardous area certifications have a temperature range limitation of 0 - 65°C.

<sup>6</sup> >1500 psi DP as a Special Order.

<sup>7</sup> Metal and Teflon Seats <5% of full scale.

<sup>8</sup> Alarm modes are dependent on the communications interface. These are described in the corresponding digital communication interface manual.

# Product Specifications

	RS485/Analog	Profibus®	DeviceNet™	EtherCAT®	EtherNet/IP™ & PROFINET
<b>Communication Protocol</b>					
<b>Electrical Connection</b>	1 x 15-pin Male Sub-D, (A)	1 x 15-pin Male Sub-D/ 1 x 9-pin Female Sub-D	1 x M12 with threaded coupling nut (B)	1 x 5-pin M8 with threaded coupling nut 2 x RJ45	1 x 5 pin M8 with threaded coupling nut / 2 x RJ45
<b>Analog I/O</b>	0 - 5 V, 1 - 5 V, 0 - 10 V, 0 - 20 mA, 4 - 20 mA		N/A	0 - 5 V	N/A
<b>Power Max. / Purge</b>	From +13.5 Vdc to +27 Vdc		From +11 Vdc to +25 Vdc	From +13.5 Vdc to +27 Vdc	
<b>Power Requirements Watts, Max.</b>	Valve Orifice >0.032": 8W Valve Orifice ≤0.032": 5W Without Valve: 2W		Valve Orifice >0.032": 10W Valve Orifice ≤0.032": 7W Without Valve: 4W	Valve Orifice >0.032": 8.5W Valve Orifice ≤0.032": 5.5W Without Valve: 2.5W	Valve Orifice >0.032": 10W Valve Orifice ≤0.032": 7W Without Valve: 3W
<b>Web-based Network Settings Interface</b>	N/A				The Default Network Address is 192.168.1.100 EtherNet/IP: Default Network Configuration is DHCP PROFINET: The Default Name is "brooks-sla"

## Flow Input (Voltage) Specifications

<b>Nominal Range</b>	0 - 5 Vdc, 1 - 5 Vdc or 0 - 10 Vdc
<b>Full Range</b>	(-0.5) - 11 Vdc
<b>Absolute Max</b>	18 V (without damage)
<b>Input Impedance</b>	>990 kOhms
<b>Required Max. Sink Current</b>	0.002 mA

## Flow Input (Current) Specifications

<b>Nominal Range</b>	4 - 20 mA or 0 - 20 mA
<b>Full Range</b>	0 - 22 mA
<b>Absolute Max</b>	24 mA (without damage)
<b>Input Impedance</b>	100 Ohms

## Flow Output (Voltage) Specifications

<b>Nominal Range</b>	0 - 5 Vdc, 1 - 5 Vdc or 0 - 10 Vdc
<b>Full Range</b>	(-1) - 11 Vdc
<b>Min Load Resistance</b>	2 kOhms

## Flow Output (Current) Specifications

<b>Nominal Range</b>	0 - 20 mA or 4 - 20 mA
<b>Full Range</b>	0 - 24.6 mA (@ 0 - 20 mA); 3.8-24.6 mA (@ 4 -20 mA)
<b>Max. Load</b>	380 Ohms (for supply voltage: <16 Vdc)

## Analog I/O Alarm Output<sup>9</sup>

<b>Type</b>	Open Collector
<b>Max. Closed (On) Current</b>	25 mA
<b>Max. Open (Off) Leakage</b>	1µA
<b>Max. Open (Off) Voltage</b>	30 Vdc

## Analog I/O Valve Override Signal Specifications<sup>10</sup>

<b>Floating / Unconnected</b>	Instrument controls valve to command set point
<b>VOR &lt;0.3 Vdc</b>	Valve Closed
<b>1 Vdc &lt; VOR &lt; 4 Vdc</b>	Valve Normal
<b>VOR &gt;4.8 Vdc</b>	Valve Open
<b>Input Impedance</b>	800 kOhms
<b>Absolute Max. Input</b>	(-25 Vdc) < VOR < 25 Vdc (without damage)

<sup>9</sup> The Alarm Output is an open collector or "contact type" that is CLOSED (on) whenever an alarm is active. The Alarm Output may be set to indicate any one of various alarm conditions.

<sup>10</sup> The Valve Override Signal (VOR) is implemented as an analog input which measures the voltage at the input and controls the valve based upon the measured reading as shown in this section.

## SLA5800 Series Biotech

### Options Packages

#### Performance Package - Model Code S or U (Position XII)

Includes multiple performance enhancements reducing cost of operation	
High Turndown Ratio	Reduces number of MFCs needed to control wide flow ranges
Enhanced Control Valve	Extremely low leak rate can eliminate need for redundant valves
Enhanced Sensor Design	Clean welded construction meets industry standards for cleanliness
Pre-calibrated Multi-Gas Pages <sup>11</sup>	Air, CO <sub>2</sub> , N <sub>2</sub> & O <sub>2</sub> : gas pages can be changed in situ to reduce the variety of spare instruments kept in stock

#### Premium Package - Model Code T or V (Position XII)

Performance Package Features plus:	
Includes premium materials and associated certificates tailored to industry requirements	
Class VI Elastomers	FDA/USP Class VI and ADI Free O-Rings and Valve Seats <sup>12</sup> (Certificate Included)
Certifications	Materials of Construction (wetted path) 2.1 Material Cert <sup>13</sup> ICC Calibration Traceability

<sup>11</sup> CO<sub>2</sub> Actual Gas Calibration available for SLAMF50/60 & SLAMF51/61. Use Model Code U for Performance Package, and Model Code V for Premium package.

<sup>12</sup> All Class VI Viton elastomers are also compliant to 21CFR177.2600 (Title 21 – Food & Drugs, Chapter I - FDA).

<sup>13</sup> 3.1 Material Certs for pressure boundary components available as an option on Premium Package.

	SLA5850/60	SLA5851/61	SLA5853/63
<b>Performance</b>			
<b>Full Scale Flow Range<sup>15</sup></b> (N <sub>2</sub> , Eq. 0°C Ref)	5 sccm - 50 slpm	15 - 150 slpm <sup>14</sup>	100 - 1100 slpm >1100 - 2500 slpm
<b>Gasses Supported</b>	Air, CO <sub>2</sub> , Nitrogen & Oxygen		
<b>Flow Accuracy—17025 Certified Devices</b> (includes linearity, excludes calibration system measurement uncertainty per SEMI E69)	±0.6% of S.P. (20 - 100% F.S.), ±0.12% of F.S. (<20% F.S.)		±0.6% of F.S.
<b>Flow Accuracy</b> (includes linearity and calibration system measurement uncertainty per SEMI E69) <sup>16</sup>	±0.9% of S.P. (20 - 100% F.S.), ±0.18% of F.S. (<20% F.S.)		±1.0% of F.S.
<b>Repeatability &amp; Reproducibility</b>	0.20% S.P.		
<b>Turndown</b> (Control Range)	250:1	250:1	150:1
<b>Response Time</b>	<1 Second	<1 Second	<3 Second
<b>Zero Stability</b>	<+0.2% F.S. per year		
<b>Temperature Coefficient</b>	<0.05% F.S. per °C		
<b>Valve Shut Down</b> (Leak-by)	<0.005 sccm		<15.6 sccm

#### Ratings

<b>Inlet Pressure Range</b>	5 psig - 75 psig	10 psig - 75 psig	8 psig - 75 psig
<b>Minimum Pressure Differential</b> (Controllers) <sup>17</sup>	5 psi / 0.35 bar	10 psi / 0.69 bar	Min.: 7.5 psi / 0.52 bar at 500 lpm Min.: 14.5 psi / 1.00 bar at 1000 lpm Min.: 35.0 psi / 2.41 bar at 2500 lpm
<b>Maximum Pressure Differential</b> (Controllers) <sup>18</sup>	75 psi / 5 bar		
<b>Maximum Pressure</b>	Same as standard		
<b>Valve Configuration</b>	Standard SLA with Special Factory Tuning / Normally Closed		
<b>Operating Temperature Range</b>	-14°C - 50°C		
<b>Sensor Design</b>	Enhanced construction to meet industry standards for cleanliness		

<sup>14</sup> Maximum flow depends on pressure conditions; consult Applications Engineering for details


<sup>15</sup> Calibration on CO<sub>2</sub> available as an option on SLA5850/60 & SLA5851/61

<sup>16</sup> Accuracy at Calibration Conditions; Accuracy spec valid across the full control range

<sup>17</sup> Performance at minimum inlet pressure will be gas and flow range dependent. Consult Applications Engineering for details

<sup>18</sup> For optimum performance operate at the specified inlet and outlet pressure values

## SLA58 Sizes - 50, 51, 60, 61

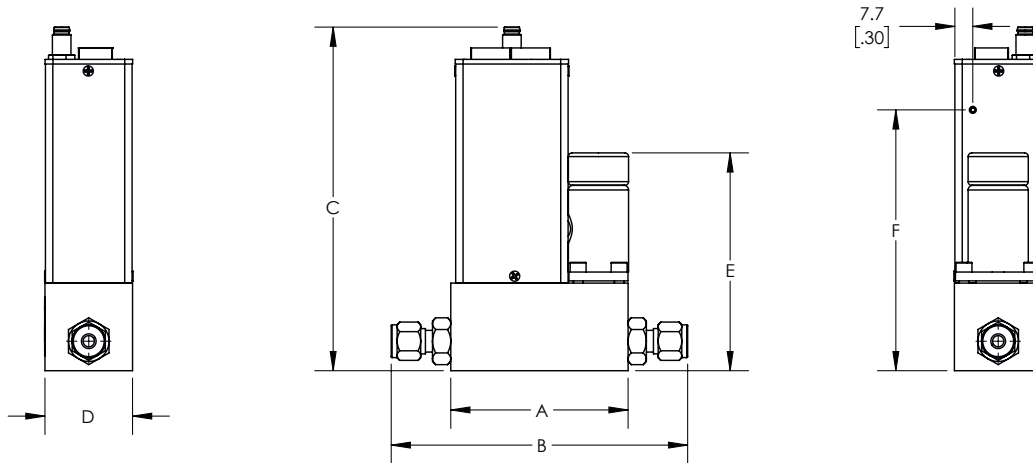


Fittings - Dimension "B"


Fitting	50	51**	60	61**
	mm / inch	mm / inch	mm / inch	mm / inch
9/16" - 18 UNF	76.4 / 3.01	93.5 / 3.68	58.6 / 2.31	80.0 / 3.15
1/8" Tube Comp.	123.1 / 4.85	N/A	105.3 / 4.15	N/A
1/4" Tube Comp.*	127.7 / 5.03	144.8 / 5.7	109.9 / 4.33	131.3 / 5.17
3/8" Tube Comp.*	130.7 / 5.15	147.9 / 5.82	112.9 / 4.45	134.4 / 5.29
1/2" Tube Comp.*	134.8 / 5.31	152.0 / 5.98	117 / 4.61	138.4 / 5.45
1/4" VCO	116 / 4.56	141.3 / 5.56	98.2 / 3.87	119.6 / 4.71
3/8" - 1/2" VCO	127.2 / 5.01	144.3 / 5.68	109.4 / 4.31	130.9 / 5.15
1/4" NPT-F	118.5 / 4.67	133.2 / 5.24	98.8 / 3.89	122.2 / 4.81
3mm Tube Comp.*	122.2 / 4.81	135.7 / 5.34	104.4 / 4.11	N/A
6mm Tube Comp.*	127.8 / 5.03	144.9 / 5.71	110 / 4.33	131.3 / 5.17
10mm Tube Comp.*	131.1 / 5.16	148.3 / 5.84	113.5 / 4.47	134.9 / 5.31
1/4" VCR	124.1 / 4.89	141.3 / 5.56	106.3 / 4.19	127.8 / 5.03
3/8" - 1/2" VCR	131.7 / 5.19	148.9 / 5.86	113.9 / 4.48	135.4 / 5.33
1/4" RC (BSP)	116.6 / 4.59	133.7 / 5.27	98.8 / 3.89	120.2 / 4.73
1/2" Sanitary	140.5 / 5.53	157.5 / 6.2	122.7 / 4.83	144.0 / 5.67
3/4" Sanitary	140.5 / 5.53	157.5 / 6.2	122.7 / 4.83	144.0 / 5.67

\* Overall length is finger tight.

\*\* Devices with 5848 inlet filter will be 1.41" Longer.

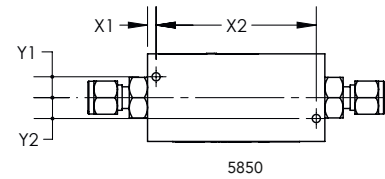

5850

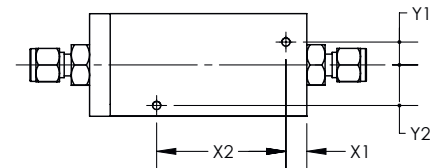

5852 / 5860 / 5861


Mounting Holes

Model	X1	X2	Y1	Y2
	mm / inch	mm / inch	mm / inch	mm / inch
5850	3.7 / .14	69.0 / 2.72	9.0 / .35	9.0 / .35
5851	9.0 / .35	55.7 / 2.19	9.9 / .39	17.4 / .68
5860	9.1 / .36	40.4 / 1.59	10.2 / .40	10.2 / .40
5861	11.7 / .46	39.4 / 1.55	17.3 / .68	17.3 / .68

Electro / Mechanical Dimensions

Model	A	C						D	E			F
		Analogue RS485	Profibus	DeviceNet	EtherCAT	ProfiNet / EtherNet	Foundation Fieldbus		N.C.	N.O.	NO VALVE	
		mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch		mm / inch	mm / inch	mm / inch	mm / inch
5850	76.4 / 3.01	137.4 / 5.41	137.4 / 5.41	134.1 / 5.28	148.0 / 5.83	148.0 / 5.83	148.0 / 5.83	37.7 / 1.48	93.2 / 3.67	100.3 / 3.95	45.7 / 1.80	112.3 / 4.42
5851	93.5 / 3.68	143.9 / 5.66	143.9 / 5.66	140.5 / 5.53	154.4 / 6.08	154.4 / 6.08	154.4 / 6.08	44.2 / 1.74	100.3 / 3.95	107.8 / 4.24	52.1 / 2.05	118.8 / 4.68
5860	58.6 / 2.31	137.4 / 5.41	137.4 / 5.41	134.1 / 5.28	148.0 / 5.83	148.0 / 5.83	148.0 / 5.83	37.7 / 1.48	N/A	N/A	N/A	112.3 / 4.42
5861	80.0 / 3.15	143.9 / 5.66	143.9 / 5.66	140.5 / 5.53	154.4 / 6.08	154.4 / 6.08	154.4 / 6.08	44.2 / 1.74	N/A	N/A	N/A	118.8 / 4.68

## SLA58 Sizes - 53, 63


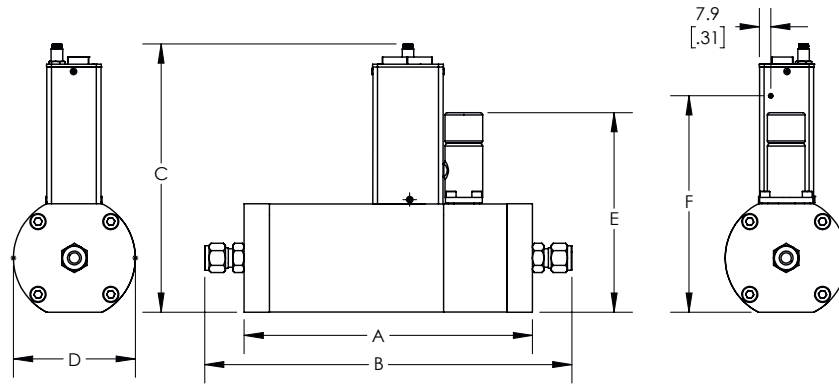


Fittings / Flanges - Dimension "B"

Fitting / Flange	53	63
	mm / inch	mm / inch
9/16" - 18 UNF	199 / 7.8	155 / 6.1
1-1/16" - 12 UN	199 / 7.8	155 / 6.1
1-5/16" - 12 UN	199 / 7.8	155 / 6.1
3/8" Tube Comp.*	253 / 10	209 / 8.2
1/2" Tube Comp.*	267 / 10.5	223 / 8.8
3/4" Tube Comp.*	267 / 10.5	223 / 8.8
1" Tube Comp.*	274 / 10.8	232 / 9.1
3/8" - 1/2" VCO	249 / 9.8	206 / 8.1
3/4" VCO	257 / 10.1	213 / 8.4
1" VCO	259 / 10.2	216 / 8.5
1/2" NPT	199 / 7.8	155 / 6.1
1" NPT	199 / 7.8	155 / 6.1
1 - 1/2" NPT	199 / 7.8	155 / 6.1
12mm Tube Comp.*	N/A	219 / 8.62
3/8" - 1/2" VCR	257 / 10.1	213 / 8.4
3/4" VCR	279 / 11	236 / 9.3
1" VCR	285 / 11.2	241 / 9.5
1/2" RC (BSP)	199 / 7.8	155 / 6.1
1" RC (BSP)	199 / 7.8	155 / 6.1
1/2" Sanitary	262.6 / 10.34	220 / 8.64
3/4" Sanitary	262.6 / 10.34	220 / 8.64
1" Sanitary	262.6 / 10.34	220 / 8.64
ANSI 1/2" 150#	299 / 11.8	256 / 10.1
ANSI 1/2" 300#	299 / 11.8	256 / 10.1
ANSI 1" 150#	299 / 11.8	256 / 10.1
ANSI 1" 300#	299 / 11.8	256 / 10.1
ANSI 1.5" 150#	299 / 11.8	256 / 10.1
ANSI 1.5" 300#	299 / 11.8	256 / 10.1
ANSI 2" 150#	299 / 11.8	256 / 10.1
ANSI 2" 300#	299 / 11.8	256 / 10.1
DIN DN15 PN40	299 / 11.8	256 / 10.1
DIN DN25 PN40	299 / 11.8	256 / 10.1
DIN DN40 PN40	299 / 11.8	256 / 10.1

\* Overall length is finger tight.

Fitting Configurations

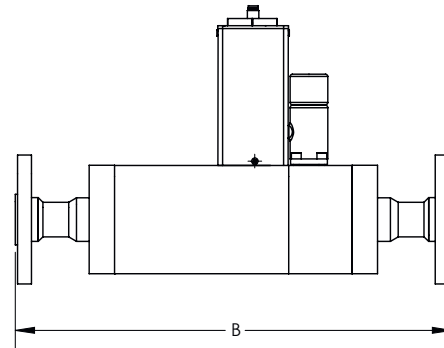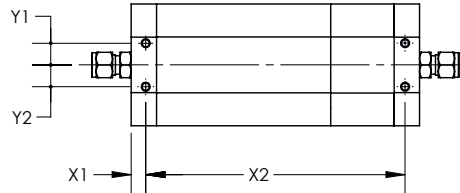

Flange Configurations

Mounting Holes

Model	X1	X2	Y1	Y2
	mm / inch	mm / inch	mm / inch	mm / inch
5853	10.0 / .39	178.8 / 7.04	15.0 / .59	15.0 / .59
5863	10.0 / .39	135.0 / 5.32	15.0 / .59	15.0 / .59

Electro / Mechanical Dimensions

Model	A	C						D	E	F
		Analog RS485	Profibus	DeviceNet	EtherCAT	ProfiNet / EtherNet	Foundation Fieldbus			
		mm / inch	mm / inch	mm / inch	mm / inch	mm / inch	mm / inch			
5850	199.0 / 7.8	174.3 / 6.86	174.3 / 6.86	171.0 / 6.73	184.9 / 7.28	184.9 / 7.28	184.9 / 7.28	84.0 / 3.31	137.0 / 5.4	149.2 / 5.87
5851	155.0 / 6.1	174.3 / 6.86	174.3 / 6.86	171.0 / 6.73	184.9 / 7.28	184.9 / 7.28	184.9 / 7.28	84.0 / 3.31	N/A	149.2 / 5.87

Code Description	Code Option	Option Description
I. Base Model Numbers	SLA	
II. Package / Finish Specifications	58	Standard Elastomer Series
III. Function	5	Mass Flow Controller
	6	Mass Flow Meter
IV. Body Size (Select based on Flow Range)	0	3 ccm - 50 lpm
	1	15 - 150 lpm
	3	100 - 2500 lpm
V. Digital I/O Communication	A	None (select applicable analog I/O)
	D	DeviceNet I/O (with 5-pin micro connector)
	E	EtherCAT I/O (with 5-pin Nano-change connector)
	P	Profibus (2x sub-D)
	S	RS485 (select applicable analog I/O)
	7	EtherNET/IP™ I/O (with 5-pin Nano-change M8 Connector)
	8	PROFINET (with 5-pin Nano-change M8 Connector)
VI. Mechanical Connection (Body size 0 & 1 only)	1A	Without adapters, 9/16" - 18 UNF
	1B	1/4" tube compression
	1C	1/8" tube compression
	1D	3/8" tube compression
	1E	1/4" VCR
	1F	1/4" VCO
	1G	1/4" NPT
	1H	6mm tube compression
	1J	10mm tube compression
	1L	3/8" - 1/2" VCR
	1M	3/8" - 1/2" VCO
	1P	1/2" tube compression
	1S	Elastomer downport
	1T	1/4" RC (BSP)
	1Y	3mm tube compression
	B1	1/4" tube compression with Filter
	C1	1/8" tube compression with Filter
	D1	3/8" tube compression with Filter
	E1	1/4" VCR with Filter
	F1	1/4" VCO with Filter
	G1	1/4" NPT with Filter
	H1	6mm tube compression with Filter
	J1	10mm tube compression with Filter
	L1	3/8" - 1/2" VCR with Filter
	M1	3/8" - 1/2" VCO with Filter
	P1	1/2" tube compression with Filter
	T1	1/4" RC (BSP) with Filter
	Y1	3mm tube compression with Filter
	5A <sup>19</sup>	9/16 - 18 X 1/2" Sanitary
	5B <sup>19</sup>	9/16 - 48 X 3/4" Sanitary

<sup>19</sup> Sanitary Fittings Model Code 5A, 5B, 5C, 5D and 5E are limited to 500 psi Maximum Pressure

Code Description	Code Option	Option Description		
VI. Mechanical Connection (Body size 3 only)	2A	Without adapters, 9/16" - 18 UNF		
	2B	Without adapters, 1-1/16" - 12 UN-2B		
	2C	3/8" tube compression		
	2D	1/2" tube compression		
	2E	3/4" tube compression		
	2F	1" tube compression		
	2G	1/2" NPT (F)		
	2H	1" NPT (F)		
	2J	1-1/2" NPT (F)		
	2K	1/2" VCO		
	2L	3/4" VCO		
	2M	1/2" VCR		
	2N	1/2" RC (BSP)		
	2P	1" RC (BSP)		
	2R	Without adapters, 1-5/16"-12 UN-2B		
	2S	1" VCO		
	2T	3/4" VCR		
	2U	1" VCR		
	3A	DIN DN15 PN40 Flange		
	3B	DIN DN25 PN40 Flange		
	3C	DIN DN40 PN40 Flange		
	3D	DIN DN50 PN40 Flange		
	5C <sup>19</sup>	1 1/16-12 X 1/2" Sanitary		
	5D <sup>19</sup>	1 1/16-12 X 3/4" Sanitary		
	5E <sup>19</sup>	1 1/16-12 X 1" Sanitary		
VII. O-ring Material	A	Viton		
	B	Buna		
	C	PTFE		
	D	Kalrez		
	E	EPDM		
	J	FDA/USP Class VI and ADI Free - Viton/FKM <sup>20</sup>		
	L	FDA/USP Class VI - EPDM		
VIII. Valve Seat	A	None (Sensor only)		
	B	Viton (for body size 3, diaphragm material = Viton)		
	C	Buna (for body size 3, diaphragm material = PTFE)		
	D	Kalrez (for body size 3, diaphragm material = PTFE)		
	E	EPDM (for body size 3, diaphragm material = PTFE)		
	F	PTFE (for body size 3, diaphragm material = PTFE)		
	J	FDA/USP Class VI and ADI Free - Viton/FKM <sup>20</sup> (for body size 3, diaphragm material = FDA/USP Class VI Viton/FKM)		
IX. Valve Type	0	None (Sensor only)		
	1	Normally closed		
	2	Normally closed (Size 3, Pressure diff. >30 psig (2 bar))		
	3	Normally closed (Size 3, Pressure diff. <30 psig (2 bar))		
	4	Normally closed - high pressure		
	5	Normally open		
X. Analog I/O Communications	A	None - Digital Communication only		
	B	0 - 5 Volt	0 - 5 Volt	15-pin D-conn
	C	4 - 20 mA	4 - 20 mA	15-pin D-conn
	L	1 - 5 Volt	1 - 5 Volt	15-pin D-conn
	M	0 - 20 mA	0 - 20 mA	15-pin D-conn
	0	0 - 10 Volt	0 - 10 Volt	15-pin D-conn
	1	0 - 5 Volt	4 - 20 mA	15-pin D-conn
	2	0 - 5 Volt	0 - 20 mA	15-pin D-conn
	3	4 - 20 mA	0 - 5 Volt	15-pin D-conn
	4	0 - 20 mA	0 - 5 Volt	15-pin D-conn
9	0 - 10 Volt	0 - 5 Volt	15-pin D-conn	
XI. Power Supply Inputs	1	+15 Vdc		
	2	24 Vdc		
XII. Output Enhancements	A	Standard Response		
	S	Biotech Performance Package		
	T	Biotech Premium Package		
	U	Performance Package with CO <sub>2</sub> Calibration <sup>21</sup>		
	V	Premium Package with CO <sub>2</sub> Calibration <sup>21</sup>		

<sup>19</sup> Sanitary Fittings Model Code 5A, 5B, 5C, 5D and 5E are limited to 500 psi Maximum Pressure

<sup>20</sup> Material is compliant to 21CFR177.2600 (Title 21 – Food & Drugs, Chapter I - FDA)

<sup>21</sup> CO<sub>2</sub> Actual Gas Calibration available for SLA5850/60 & SLA5851/61







Code Description	Code Option	Option Description
XIII. Certification	1	Safe Area
	2	For Zone 2
	4	Div. 2/Zone 2 UL Recognized
	5	Zone 2 IECEX
	6	KOSHA

Sample Model Code

I	II	III	IV	V	VI	VII	VIII	IX	X	XI	XII	XIII
SLA	58	5	0	A	1A	A	B	1	B	1	A	1

## Product Approvals Overview

Mark	Agency	Certification	Applicable Standard	Details
	UL (Recognized)	Class I, Div 2, Group A, B, C, D Class I, Zone 2, IIC T4 Class II, Zone 22 Enclosure: Type 1/IP40	UL & CSA Standards	E73889 Vol 3, Sec 4
	ATEX	II 3 G Ex nA IIC T4 Gc	EN 60079-0:2012 EN 60079-15:2010	KEMA 04ATEX 1118X
	IECEx	II 3 G Ex nA IIC T4 Gc	IEC 60079-0:2011 IEC 60079-15:2010	IECEx DEK 14.0072X
	KOSHA	Ex nA IIC T4		15-AV4BO-0641 15-AV4BO-0640
	CE	EMC Directive 2014/30/EU Directive 2011/65/EU	EN:61326-1:2013	EMC RoHS

ATEX/IECEx Special Conditions: please see Certification section of the SLA5800 Installation & Operations Manual

## Additional Certification and Service Options

### Material Compliance Certifications

Material Certificate 2.1

Material Certificate 3.1

Declaration of Compliance 2.1 - O-ring USP Class VI / ADI Free

Declaration of Compliance 2.1 - Elastomer USP Class VI / ADI Free

Declaration of Compliance 2.1 - Elastomer Cure Date / Shelf Life

Declaration of Compliance 2.1 - Surface Roughness

### Metrology Certifications

Declaration of Compliance 2.1 - Calibration

Inspection Certificate 3.1 - NIST Calibration

Declaration of Compliance 3.1 - International Certificate of Calibration

ISO 17025 Certification

### Additional Services and Certifications

Certificate of Compliance 2.1

Declaration of Compliance 2.1 - Oxygen Cleaning Service

Declaration of Compliance 2.2 - Pressure Test

KHK Certification

CRN Certification

Certificate of Origin

Brooks is committed to assuring all of our customers receive the ideal flow solution for their application, along with outstanding service and support to back it up. We operate first class repair facilities located around the world to provide rapid response and support. Each location utilizes primary standard calibration equipment to ensure accuracy and reliability for repairs and recalibration and is certified by our local Weights and Measures Authorities and traceable to the relevant International Standards.

Visit [www.BrooksInstrument.com](http://www.BrooksInstrument.com) to locate the service location nearest to you.

## START-UP SERVICE AND IN-SITU CALIBRATION

Brooks Instrument can provide start-up service prior to operation when required. For some process applications, where ISO-9001 Quality Certification is important, it is mandatory to verify and/or (re)calibrate the products periodically. In many cases this service can be provided under in-situ conditions, and the results will be traceable to the relevant international quality standards.

## CUSTOMER SEMINARS AND TRAINING

Brooks Instrument can provide customer seminars and dedicated training to engineers, end users, and maintenance persons. Please contact your nearest sales representative for more details. Due to Brooks Instrument's commitment to continuous improvement of our products, all specifications are subject to change without notice.

## TRADEMARKS

Brooks .....Brooks Instrument, LLC  
All other trademarks are the property of their respective owners.



Data-Sheet-SLA5800-EN/2025-06

## Global Headquarters

### Brooks Instrument

407 West Vine Street  
Hatfield, PA  
19440-0903 USA

Toll-Free (USA): 888-554-FLOW  
T: 215-362-3500

[BrooksAM@BrooksInstrument.com](mailto:BrooksAM@BrooksInstrument.com)

A list of all Brooks Instrument locations and contact details can be found at [www.BrooksInstrument.com](http://www.BrooksInstrument.com)

©Copyright 2025 Brooks Instrument, LLC All rights reserved. Printed in U.S.A.

**BROOKS®**  
INSTRUMENT  
*Beyond Measure*