



Model GP200 with EtherCAT®

# GP200 Series

## Metal Sealed, Digital, Ultra-high Purity Pressure-based Mass Flow Controllers for Gases

The GP200 Series is the first fully (both inlet and outlet) pressure insensitive P-MFC, designed specifically for semiconductor applications. The GP200's unique differential pressure technology, coupled with its downstream valve architecture, removes the current limitations of pressure-based mass flow controllers, enabling the most precise process gas delivery over the widest range of operating conditions in the industry.

As the inventor and market leader in gas and flow range programmable Mass Flow Controllers, Brooks sophisticated and proprietary MultiFlo™ gas model is now embedded within each GP200 device enabling on-the-fly gas & range reconfiguration for maximum process flexibility.

The GP200's ultra-fast, highly repeatable Matched Transient Response and dynamic cross-talk insensitivity enable tighter process control, handling extreme supply pressure variations while maintaining precise mass flow control to the chamber. The GP200 platform supports a broad range of process conditions which enables drop-in replacement and upgrade of many traditional pressure-based mass flow controllers.

Features	Benefits
True Differential Pressure Measurement	By removing the requirement to match and compensate two separate pressure transducers, the GP200 differential pressure technology reduces measurement uncertainty for enhanced accuracy, repeatability and drift performance.
Lower Inlet Pressure Option	Safer fab operation at lower inlet pressures is now achievable with a P-MFC due to the GP200's differential pressure sensor that is specifically optimized for low differential pressure measurement.
Cross-Talk Insentive	Maintains tight process control under dynamic process conditions- the accuracy of the GP200 P-MFC will stay within $\pm 1\%$ of S.P. during extreme pressure supply disruptions up to 40 psi/sec
Matched Transient Response	Ultra-fast, highly repeatable ascending and descending flow stabilization time enables tighter process control in advanced high cycle Deposition and Etch processes.
Downstream Value Architecture	The GP200's downstream valve architecture ensures that accuracy is independent of downstream pressure, enabling flow delivery into pressures as high as 1200 Torr. The GP200's fast closing valve addresses non-productive recipe wait times, or "tail effects", that are seen in upstream MFC valve designs that require additional time to bleed down their internal volume of gas.
Zero Leak-by Control Valve	100X improvement in valve shut-down addresses the long standing "first wafer effect" where the accumulation of unmetered gas (between the MFC control valve & downstream isolation valve) contributes to non-uniformities and Critical Dimension (CD) defects on the first wafer of a process.
High Flow Rate Capability	10 sccm to 50 slm F.S. N2 equivalent P-MFC supports all process flow needs with just nine (9) standard bin configurations for maximum flexibility.

# Product Specifications

Performance									
Full Scale Flow Range	3 sccm to 50,000 sccm F.S. N2 Equivalent								
Process Gas Flow Accuracy <sup>1</sup>	<table border="1"> <thead> <tr> <th>Zero Leak Valve:</th> <th>Metal Seal Valve:</th> </tr> </thead> <tbody> <tr> <td>&lt; ± 1% S.P. (5 – 100% F.S.)</td> <td>&lt; ± 1% S.P. (5-100% F.S.)</td> </tr> <tr> <td>&lt; ± 0.05% F.S. (0.5 - 5% F.S.)</td> <td>&lt; ± 0.05% F.S. (2-5% F.S.)</td> </tr> </tbody> </table>	Zero Leak Valve:	Metal Seal Valve:	< ± 1% S.P. (5 – 100% F.S.)	< ± 1% S.P. (5-100% F.S.)	< ± 0.05% F.S. (0.5 - 5% F.S.)	< ± 0.05% F.S. (2-5% F.S.)		
Zero Leak Valve:	Metal Seal Valve:								
< ± 1% S.P. (5 – 100% F.S.)	< ± 1% S.P. (5-100% F.S.)								
< ± 0.05% F.S. (0.5 - 5% F.S.)	< ± 0.05% F.S. (2-5% F.S.)								
Control Range	0.5– 100% F.S.								
Repeatability & Reproducibility	5-100% = ± 0.15% of S.P. 0.5-5% = ± 0.015% of F.S.								
Transient Response & Flow Settling Time	280 ± 20 ms Matched Transient Response, for any ascending or descending non-zero setpoint (Fast Response Option available via Customer Special Request.)								
Valve Leak-by	<table border="1"> <thead> <tr> <th>Zero Leak Valve:</th> <th>Metal Seal Valve:</th> </tr> </thead> <tbody> <tr> <td>&lt;0.005% of F.S. of the bin (Bins 42-46)</td> <td>&lt;0.15% of F.S. of the bin</td> </tr> <tr> <td>&lt;0.02% of F.S. of the bin (Bins 40-41)</td> <td>(@ 45 psia to VAC)</td> </tr> <tr> <td>(@ 45 psia to VAC)</td> <td></td> </tr> </tbody> </table>	Zero Leak Valve:	Metal Seal Valve:	<0.005% of F.S. of the bin (Bins 42-46)	<0.15% of F.S. of the bin	<0.02% of F.S. of the bin (Bins 40-41)	(@ 45 psia to VAC)	(@ 45 psia to VAC)	
Zero Leak Valve:	Metal Seal Valve:								
<0.005% of F.S. of the bin (Bins 42-46)	<0.15% of F.S. of the bin								
<0.02% of F.S. of the bin (Bins 40-41)	(@ 45 psia to VAC)								
(@ 45 psia to VAC)									
Supply Pressure Insensitivity/Cross-Talk	< ± 1% S.P. up to 40 psi/sec inlet pressure spike								
Steady State Back Pressure Insensitivity	Insensitive to steady state back pressure								
Dynamic Back Pressure Insensitivity	Maintains accuracy during disturbance from vacuum to 1200 Torr over a period of 1 sec								
Zero Stability	< ± 0.15% F.S. per year								
Temperature Coefficient	Zero: 0.005% F.S. per °C Span: 0.05% S.P. per °C								
Number of Standard Configurations	Nine (9) standard bin ranges								
Dynamic Gas and Range Programmability	Device may be configured via single tool command in less than 1 second or via BEST Software with independent USB diagnostic port								
Attitude Insensitivity	Insensitive to device orientation after re-zeroing								
<sup>1</sup> For Analog control, adder of < ± 0.05% F.S. applies									
Ratings									
Operating Temperature Range <sup>2</sup>	10 – 60°C								
Operating Inlet Pressure <sup>3</sup>	< 15 psia for Low Pressure (LP) bins, configurable based on application 15 to 30 psia 25 to 40 psia 35 to 50 psia 45 to 60 psia								
Operating Outlet Pressure <sup>3</sup>	Vacuum to Atmosphere Up to 1200 Torr for some applications								
Differential Pressure Range	Min: 7 psid typical Max: up to 50 psid								
External Leak Integrity	1 x 10-10 atm cc/sec He								
Proof Pressure	100 psia, Standard Gases 70 psia, Helium and Helium Mixtures 45 psia, Low Pressure Gases								
Design Pressure	150 psia								
Burst Pressure	1000 psia								
Mechanical									
Valve Type	Normally Closed								
Primary Wetted Materials	316L, Hastelloy C-22, 316/316L Stainless Steel, 304 Stainless Steel, KM-45, PCTFE								
Surface Finish	5µ inch Ra avg.								

<sup>2</sup> Device should be zeroed at ambient operating temperature per Brooks Instrument recommended procedure

<sup>3</sup> Consult Brooks Configurator for specific Product Sizing Options

## Diagnostics & Display

<b>Status Lights</b>	DeviceNet: MFC Health, Network Status EtherCAT: Run, Error, Power, Network Status, Analog/RS485: Network Status
<b>Alarms<sup>4</sup></b>	Process Control Deviations, Flow High/Low, Temperature High/Low, Pressure High/Low, Voltage Input High/Low, Communication Alarms, Hardware Failures, Page Create Errors, Warmup Alarm (alarms are model specific)
<b>Display Type</b>	Top Mount Integrated LCD
<b>Viewing Angle/Viewing Distance</b>	Rotatable / 10 ft
<b>Units Displayed/Resolution</b>	Flow (%), Temp. (°C), Pressure (psia, kPa) / 0.1 (unit)

## Electrical

<b>Digital Communication</b>	DeviceNet™, EtherCAT®, RS485 (model specific)
<b>Electrical Connection</b>	DeviceNet™ via 5-Pin M12 connector EtherCAT® via RJ45 jacks, Power via 5-pin M8 connector 0-5V Analog/RS485 (L-Protocol) via 9-pin D-Connector
<b>Independent Diagnostics Service Port</b>	RS485 via micro-USB
<b>DeviceNet Power Supply/Consumption</b>	545mA max. @ +11-25 Vdc, 250mA max. @ 24 Vdc (under typical operating conditions)
<b>EtherCAT Power Supply/Consumption</b>	360mA max @ 18-30 Vdc, 270mA max @ 24 Vdc (under typical operating conditions)
<b>Analog/RS485 Power Supply/Consumption</b>	6 Watts max @ ± 15 Vdc (± 10%) or +24Vdc (± 10%) (under typical operating conditions)

## Compliance


<b>EMC</b>	2014/30/EU EMC Directive EN:61326-1: 2013
<b>Environmental Compliance</b>	2011/65/EU & 2015/863/EU RoHS Directive EC 1907/2006 REACH Directive

<sup>4</sup> For full list of alarms available consult GP200 Supplemental Communication Manuals at [www.BrooksInstrument.com](http://www.BrooksInstrument.com)

# Electrical Interface Options


## Base I/O Options

PDC Ordering Code G1  
Description: Industry standard  
Analog / RS485 interface



Pin No.	Signals	
1	Valve Control	
2	Output (0-5 Vdc)	
3	+15 Vdc	+24 Vdc
4	Pwr Com	NC
5	-15 Vdc	Pwr Com
6	Setpoint (0-5 Vdc)	
7	Signal Common	
8	RS-485 (DX+)	
9	RS-485 (DX-)	





PDC Ordering Code TX  
Description: Industry standard  
Analog only interface



Pin No.	Signals	
1	Valve Control	
2	Output (0-5 Vdc)	
3	+15 Vdc	+24 Vdc
4	Pwr Com	NC
5	-15 Vdc	Pwr Com
6	Setpoint (0-5 Vdc)	
7	Signal Common	
8	No Connection	
9	No Connection	



## DOWNPORT CONFIGURATIONS

ELECTRICAL CONNECTOR  
EO SPECIFIC DIMENSIONS






POKE YOKE CONFIGURATION

ELECTRICAL CONNECTOR  
DX, DO-DE SPECIFIC DIMENSIONS






ELECTRICAL CONNECTOR  
G1/IX SPECIFIC DIMENSIONS






FITTING OPTION CODE	SEAL TYPE	A	B	C	D	E	F	G
CX	C-SEAL	3.62 in [92mm]	4.13 in [105mm]	0.86 in [22mm]	1.12 in [28mm]	3.28 in [83mm]	1.00 in [25mm]	5.00 in [127mm]
LX	C-SEAL	3.62 in [92mm]	4.13 in [105mm]	0.86 in [22mm]	1.12 in [28mm]	3.28 in [83mm]	1.00 in [25mm]	5.00 in [127mm]
WX	W-SEAL	3.62 in [92mm]	4.13 in [105mm]	0.86 in [22mm]	1.12 in [28mm]	3.28 in [83mm]	1.00 in [25mm]	5.00 in [127mm]

## VCR CONFIGURATIONS




ELECTRICAL CONNECTOR  
E0 SPECIFIC DIMENSIONS

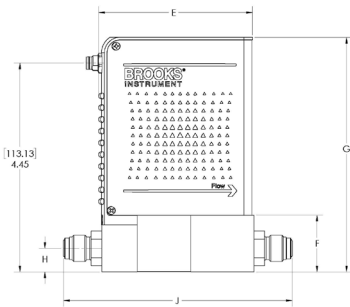

ELECTRICAL CONNECTOR  
DX, DO-DE SPECIFIC DIMENSIONS

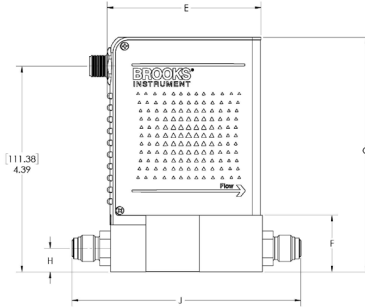

ELECTRICAL CONNECTOR  
G1/TX SPECIFIC DIMENSIONS

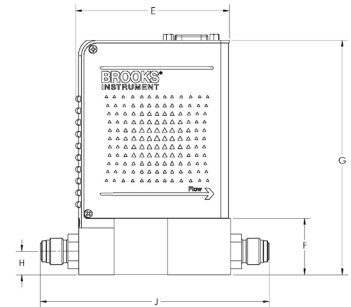

FITTING OPTION CODE	VCR	A	B	C	D	E	F	G	H	J
VS	1/4"	2.72in [69mm]	3.24in [82mm]	0.72in [18mm]	1.12in [28.4mm]	3.28in [83mm]	1.21in [31mm]	5.00in [127mm]	0.50in [13mm]	4.88in [124mm]

Code Description		Code Option	Option Description								
I.	Base Model Code	GP200	Ultra-High Purity Pressure-Based Mass Flow Controllers								
II.	Valve Configuration	P	Positive Shut-off/Zero Leak-by Valve <sup>5</sup>								
		C	Normally Closed Valve with Metal Valve Seat								
III.	Gas and Range <sup>6</sup>	0013 010C	10 sccm F.S. N2 Equivalent, CT40 Standard Bin Configuration at 35 psia inlet, vacuum outlet								
		0013 030C	30 sccm F.S. N2 Equivalent, CT41 Standard Bin Configuration at 35 psia inlet, vacuum outlet								
		0013 100C	100 sccm F.S. N2 Equivalent, CT42 Standard Bin Configuration at 35 psia inlet, vacuum outlet								
		0013 300C	300 sccm F.S. N2 Equivalent, CT43 Standard Bin Configuration at 35 psia inlet, vacuum outlet								
		0013 001L	1,000 sccm F.S. N2 Equivalent, CT44 Standard Bin Configuration at 35 psia inlet, vacuum outlet								
		0013 003L	3,000 sccm F.S. N2 Equivalent, CT45 Standard Bin Configuration at 35 psia inlet, vacuum outlet								
		0013 010L	10,000 sccm F.S. N2 Equivalent, CT46, Standard Bin Configuration at 35 psia inlet, vacuum outlet								
		0013 025L	25,000 sccm F.S. N2 Equivalent, CT47 Standard Bin Configuration at 35 psia inlet, vacuum outlet								
IV.	Standard Type (CT) Bin		Consult Brooks Configurator or Bin Tables								
		CT40	Standard Bin Configuration #40								
		CT41	Standard Bin Configuration #41								
		CT42	Standard Bin Configuration #42								
		CT43	Standard Bin Configuration #43								
		CT44	Standard Bin Configuration #44								
		CT45	Standard Bin Configuration #45								
		CT46	Standard Bin Configuration #46								
		CT47	Standard Bin Configuration #47								
CT48	Standard Bin Configuration #48										
V.	Low Pressure (LP) Bin	LP40	Low Pressure Bin Configuration #40								
		LP41	Low Pressure Bin Configuration #41								
		LP42	Low Pressure Bin Configuration #42								
		LP43	Low Pressure Bin Configuration #43								
		LP44	Low Pressure Bin Configuration #44								
		LP45	Low Pressure Bin Configuration #45								
		LP46	Low Pressure Bin Configuration #46								
VI.	Fittings	CX	1-1/8" body width, 92mm C-Seal								
		WX	1-1/8" body width, 92mm W-Seal								
		VS	1-1/8" body width, 124mm 1/4" VCR male								
		LX	1-1/8" body width, 92mm C-Seal w/Poke Yoke								
VII.	Communications/Connector	Code Option	I/O	Power On State	Full Scale Setting		Producer	Consumer	Poll IO State Transition	External Baud Rate	
		D0	DeviceNet	Idle	Count	Integer	6000h	2	7	Executing	500KB
		D1	DeviceNet	Idle	Count	Integer	6000h	21	7	Executing	500KB
		D2	DeviceNet	Idle	SCCM	Float	7FFFh	13	19	Executing	500KB
		D3	DeviceNet	Idle	Count	Integer	6000h	22	7	Executing	500KB
		D4	DeviceNet	Executing	Count	Integer	6000h	22	8	Executing	500KB
		D5	DeviceNet	Idle	Count	Integer	6000h	6	8	Executing	500KB
		D6	DeviceNet	Idle	Count	Integer	7FFFh	3	7	Executing	500KB
		D7	DeviceNet	Idle	Count	Integer	7FFFh	6	8	Executing	500KB
		D8	DeviceNet	Idle	Count	Integer	6000h	3	7	Executing	500KB
		D9	DeviceNet	Executing	Count	Integer	6000h	2	7	Executing	500KB
		DA	DeviceNet	Idle	Count	Integer	7FFFh	22	7	Executing	500KB
		DB	DeviceNet	Idle	Count	Integer	6000h	22	8	Executing	500KB
		DC	DeviceNet	Idle	Count	Integer	7FFFh	3	7	Idle	500KB
		DD	DeviceNet	Executing	Count	Integer	7FFFh	22	8	Executing	500KB
DE	DeviceNet	Executing	SCCM	SCCM	6000h	15	19	Executing	500KB		
DX	DeviceNet		To Be Defined by Customer Special Request								

<sup>5</sup> Zero Leak Valve Option not currently available with bins CT47-CT48

<sup>6</sup> Consult Brooks Configurator or Bin Tables for specific Product Sizing Options

Code Description	Code Option	Option Description
VII. Communications/Connector	E0	EtherCAT Communication
	G1	9-Pin D-Connector with Analog/RS485 Communication
	TX	9-Pin D-Connector with Analog Only
VIII. Customer Special Request	XXXX	Customer Special Request (Consult factory for new requests)
IX. Minimum Inlet Pressure	15	15 psia minimum inlet pressure, ~15-30 psia inlet pressure range
	25	25 psia minimum inlet pressure, ~25-40 psia inlet pressure range
	35	35 psia minimum inlet pressure, ~35-50 psia inlet pressure range
	45	45 psia minimum inlet pressure, ~45-60 psia inlet pressure range
X. Downstream Condition	V	Vacuum
	A	Atmosphere
	P	Positive Pressure (760 Torr up to 1200 Torr)
XI. Auto Shut-off	A	Auto Shut Off (Included)
	X	Auto Shut Off (Not Included)
XII. Reference Temperature	00C	0°C Reference Calibration (Standard)

#### Example Model Code

I	II	III	IV	V	VI	VII	VIII	IX	X	XI
GP200	C	0013003L	CT45	CX	E0	XXXX	35	V	A	00C

[Request a Quote](#)

# Service and Support

Brooks is committed to assuring all of our customers receive the ideal flow solution for their application, along with outstanding service and support to back it up. We operate first class repair facilities located around the world to provide rapid response and support. Each location utilizes primary standard calibration equipment to ensure accuracy and reliability for repairs and recalibration and is certified by our local Weights and Measures Authorities and traceable to the relevant International Standards.

Visit [www.BrooksInstrument.com](http://www.BrooksInstrument.com) to locate the service location nearest to you.

## START-UP SERVICE AND IN-SITU CALIBRATION

Brooks Instrument can provide start-up service prior to operation when required. For some process applications, where ISO-9001 Quality Certification is important, it is mandatory to verify and/or (re)calibrate the products periodically. In many cases this service can be provided under in-situ conditions, and the results will be traceable to the relevant international quality standards.

## CUSTOMER SEMINARS AND TRAINING

Brooks Instrument can provide customer seminars and dedicated training to engineers, end users, and maintenance persons. Please contact your nearest sales representative for more details. Due to Brooks Instrument's commitment to continuous improvement of our products, all specifications are subject to change without notice.

### TRADEMARKS

Brooks ..... Brooks Instrument, LLC  
All other trademarks are the property of their respective owners.



Data-Sheet-GP200-EN/2023-07

### Global Headquarters

#### Brooks Instrument

407 West Vine Street  
Hatfield, PA  
19440-0903 USA

Toll-Free (USA): 888-554-FLOW  
T: 215-362-3500

[BrooksAM@BrooksInstrument.com](mailto:BrooksAM@BrooksInstrument.com)

A list of all Brooks Instrument locations and contact details can be found at [www.BrooksInstrument.com](http://www.BrooksInstrument.com)

© Copyright 2023 Brooks Instrument, LLC All rights reserved. Printed in U.S.A.

**BROOKS**<sup>®</sup>  
INSTRUMENT  
*Beyond Measure*